



Product Highlights:

- Housing made of corrosion resistant, high grade stainless steel (316)
- For use above or below water to up to 3 meters deep
- 180° lamp rotation with easy positioning for light direction
- Choice of three colour temperatures: warm white (3000K), neutral white (4000K) and daylight (5700K)
- Available in three beam angles: 12°, 20° and 30°
- Good protection against water, dust and impact, IP68 and IK08 certified
- Long lifetime up to 35,000 hours at L70, 35°C


Light is advancement OLUX® LED Fountain outdoor luminaires

High light output, water submersible and eco-friendly LED landscape spotlight. Discover the beauty and magic of underwater lighting.

Light is OSRAM



OLUX® LED Fountain

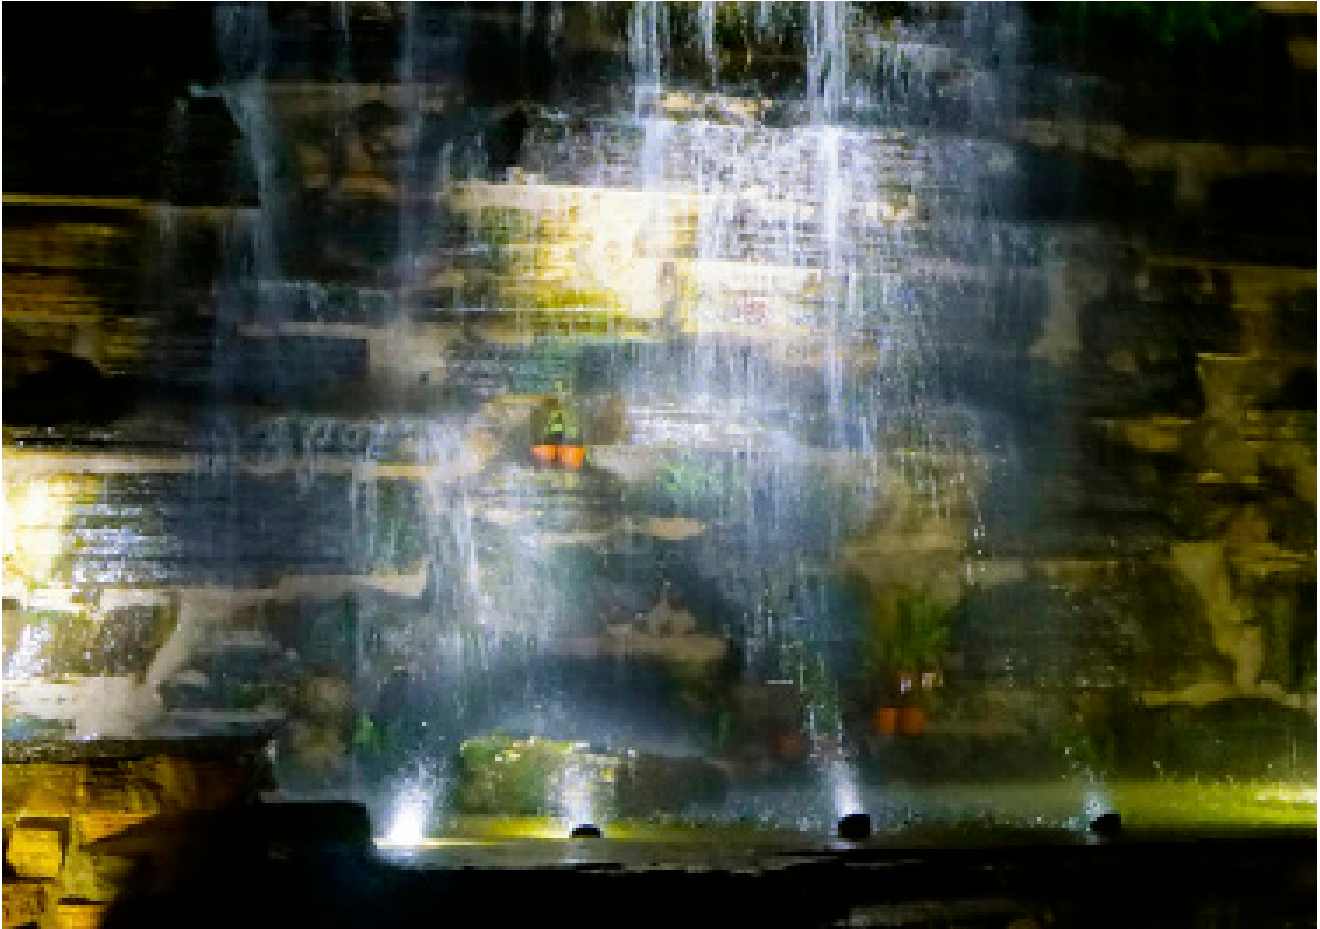

Advantages & Benefits

- Durable stainless steel housing for underwater applications
- Available in two sizes and voltages
- Multiple beam angles and colour temperatures
- Superior quality with a low initial investment

The OLUX® LED FOUNTAIN luminaire is an IP68 rated submersible spotlight designed to provide illumination under water to a depth of three meters. The OLUX® LED FOUNTAIN is available in multiple beam angles and colour temperatures, and will provide 35,000 hours of lighting with minimal maintenance. This outdoor luminaire is a great product choice for all types of lanscape design applications, in particular in and around water.

Ideal Applications

- Water-based applications: reservoirs, ponds, fountains, and theme parks
- Harsh environments: wet areas
- General landscape applications: spot, accent and façade

OLUX® LED Fountain


OLUX® LED FOUNTAIN S 12W

OLUX® LED FOUNTAIN M 24W




Light Distribution for OLUX® LED FOUNTAIN


NARROW BEAM 12°

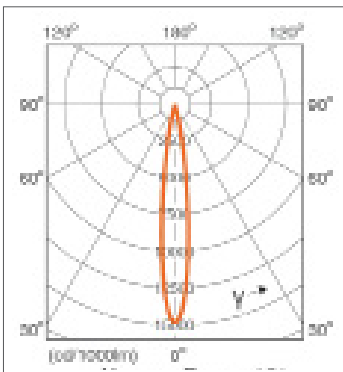

MEDIUM BEAM 20°

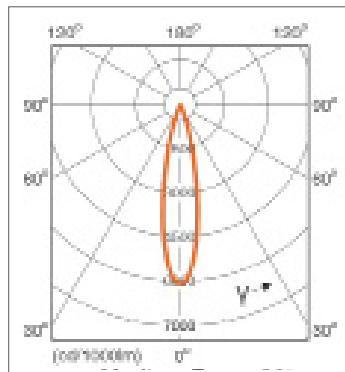

WIDE BEAM 30°

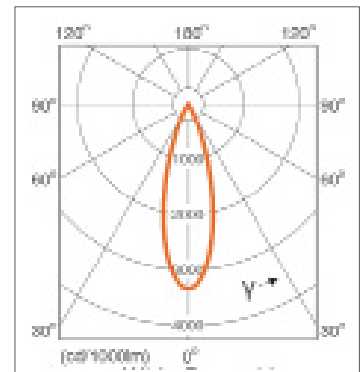

OLUX® LED Fountain

Product Reference	Code (EAN)	V	W	△°	K	lm	∅ (mm)	b (mm)	h (mm)	
OLUX® LED FOUNTAIN S24V 830N 4X1	4052899089594	24	12	12	3000	600	112	68	148	4
OLUX® LED FOUNTAIN S24V 830W 4X1	4052899089617	24	12	20	3000	600	112	68	148	4
OLUX® LED FOUNTAIN S24V 830W 4X1	4052899089631	24	12	30	3000	600	112	68	148	4
OLUX® LED FOUNTAIN S24V 740N 4X1	4052899089655	24	12	12	4000	750	112	68	148	4
OLUX® LED FOUNTAIN S24V 740M 4X1	4052899089679	24	12	20	4000	750	112	68	148	4
OLUX® LED FOUNTAIN S24V 740W 4X1	4052899089693	24	12	30	4000	750	112	68	148	4
OLUX® LED FOUNTAIN S24V 757N 4X1	4052899089716	24	12	12	5700	900	112	68	148	4
OLUX® LED FOUNTAIN S24V 757M 4X1	4052899089730	24	12	20	5700	900	112	68	148	4
OLUX® LED FOUNTAIN S24V 757W 4X1	4052899089754	24	12	30	5700	900	112	68	148	4
OLUX® LED FOUNTAIN M24V 830N 4X1	4052899089778	24	24	12	3000	1200	140	68	162	4
OLUX® LED FOUNTAIN M24V 830M 4X1	4052899089792	24	24	20	3000	1200	140	68	162	4
OLUX® LED FOUNTAIN M24V 830W 4X1	4052899089815	24	24	30	3000	1200	140	68	162	4
OLUX® LED FOUNTAIN M24V 740N 4X1	4052899089839	24	24	12	4000	1500	140	68	162	4
OLUX® LED FOUNTAIN M24V 740M 4X1	4052899089853	24	24	20	4000	1500	140	68	162	4
OLUX® LED FOUNTAIN M24V 740W 4X1	4052899089877	24	24	30	4000	1500	140	68	162	4
OLUX® LED FOUNTAIN M24V 757N 4X1	4052899089891	24	24	12	5700	1800	140	68	162	4
OLUX® LED FOUNTAIN M24V 757M 4X1	4052899089914	24	24	20	5700	1800	140	68	162	4
OLUX® LED FOUNTAIN M24V 757W 4X1	4052899089938	24	24	30	5700	1800	140	68	162	4

* Technical data subject to variation and change without notice.

